


High-Temperature Viscometer DVM-2110

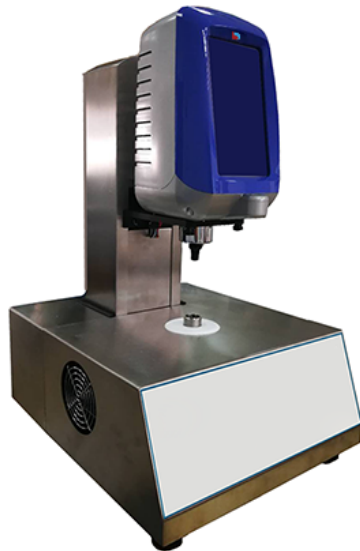

Description

High-Temperature Viscometer DVM-2110 is suitable for low, medium, high viscosity measurements. Designed with a stepper motor to divide a full rotation into an expansive number of steps for high accuracy.

Provide with 4 types of modes, 2 software, 11 compatible spindles, both the models give classic results with accuracy $\pm 1\%$ and repeatability $\pm 0.2\%$ with easy linear calibration, it is a compatible micro printer for quick data recording.

Technical:

Model No.	DVM-2110	DVM-2120
Measuring Range (mPa.s)	L 5 to 0.33 M	L 5 to 1 M
	R 50 to 3.3 M	R 25 to 10 M
	HA 100 to 6.6 M	HA 50 to 20 M
	HB 400 to 26.4 M	HB 200 to 80 M
Rotor Speed	0.3 to 100 rpm	0.1 to 200 rpm
Spindles Type	SC	
Spindle No.	SC4-21, 27, 28, 29 (Standard); SC4-14, 15, 16, 18, 25, 31, 34 (optional)	
Temperature	-1°C to 150°C	
Display	LCD Touch Screen	
Percent Accuracy	$\pm 1.0\%$	
Repeatability	$\pm 0.2\%$	
Software	SNB	DV
Electrical Requirement	AC100V/50Hz	AC220V/60Hz
Catalogue No	650650501	650651002

Shipping:	2 - 3 weeks Delivery.
speed:	0.3 to 100 rpm
reproducibility:	0.2 %
measurement_range:	L 5 to 0.33 M
temperature_range:	-1C to 150C
model:	DVM-2110

Iris Analytical Ltd.

66 W Flagler St #900
Miami, Florida 33130
United States